

## FloorBridge® SM 120 / 150 / 200 / 400 / 700

### Sealing membrane



#### Description


Supersoft-Monoflex high performance sealing band / membrane

#### Material composition

Modified thermoplastic elastomer

#### Application

For sealing under FloorBridge® joint profiles for dilatation, building separation and construction joints in interior and exterior areas. The bonding is done with the system adhesive of the FloorBridge® Connect-series 01/03/04.

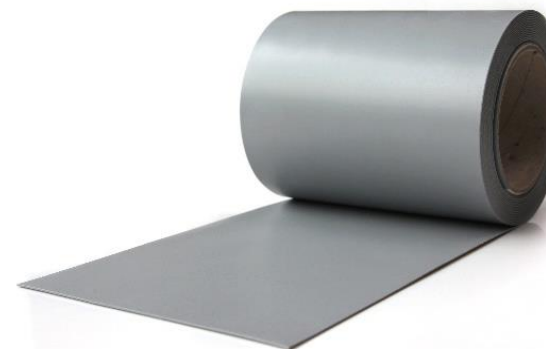

#### Product details

##### Colour

grey

##### Available widths

approx. 120 mm / 150 mm / 200 mm /  
400 mm / 700 mm

##### Thickness

approx. 1,0 mm

##### Shore-A-hardness

approx. 76

##### Roll length SM 150 + SM 200

40 m

##### Roll length SM 400 + SM 700

20 m

#### Physical values (approx.)

	DIN	Value
Burst pressure	Internal	≥ 2 bar
Tear resistance - lengthwise	DIN EN 12311-2 Method B	9,0 N / mm <sup>2</sup>
Tear resistance - across	DIN EN 12311-2 Method B	8,0 N / mm <sup>2</sup>
Elongation at break - lengthwise	DIN EN 12311-2 Method B	565 %
Elongation at break - across	DIN EN 12311-2 Method B	600 %
Water vapour permeability	DIN EN 1931 Method B	45 m
Tear resistance lengthwise / across	DIN EN 12310-1	225 N / 225 N
Water tightness	DIN EN 1928-A-60 kPa/24 Std.	watertight
	DIN EN 1928-B-400 kPa/72 Std.	watertight

#### Chemical Resistance

to Hydrochloric acid, Sulphuric acid, Citric acid,  
Lactic acid, Potassium hydroxide, Sodium  
hypochlorite, Salt water and further substances

#### Approval

CE-Marking according DIN EN 13967

#### Storage conditions / Shelf life

maximum of 12 months – it is essential that goods are kept in the original packaging,  
keep cool and dry, protect against sunlight.

#### Application instructions

##### Adhesion of the band

Only a clean, undamaged, defect-free sealing band FloorBridge® SM may be installed.  
A foam profile (edge strip. Round cord) must be inserted into the existing joint in the  
substrate to ensure continuous positive or negative joint movement.  
Apply the FloorBridge® system adhesive of the Connect series, mixed according to the  
manufacturer's instructions, using a spatula or toothed trowel in both sides along the  
joint.

Insert the FloorBridge® SM band within the open time of the adhesive and press it firmly into the adhesive using a suitable roller. Take care that no air pockets are created. In the middle of the sealing tape (above the joint), the expansion zone of the sealing tape must be exposed (not glued and free of all adhesive residues) to ensure a movement capability. The area of movement can be cleared by applying a standard masking tape (painter's masking tape).

#### **Band joints**

Bands are joined by thermal welding using hot air and pressure (hard rubber roller). The weld seams must be roughened with sandpaper (80 grain) before welding and then cleaned dust-free. Only roughen weld seams and then clean them dust-free, otherwise the remaining grinding dust could impair the bonding.

Overlap at least 10 cm in case of band connections, T-pieces, L-pieces or similar and welding with hot air blower with 340°C and 1.500 watt.

**Attention:** The temperature of 340°C and the correct time of bonding must followed exactly!

#### **Details such as band connection, gluing of the joint profile on sealing membrane**

See installation tutorial.

#### **Value Base**

All technical data stated in this product data sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

#### **Ecology, health and safety information (REACH)**

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 REACH). It contains no substances, which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product onto the market, to transport or use it. For safe use follow the instructions given in this product data sheet.

Based on our current knowledge, this product does not contain any SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list by the European Chemical Agency in concentrations above 0.1 % (w/w).

#### **Legal Notes**

The information, and, in particular, the recommendations relating to the application and end-use of FloorBridge® products, are given in good faith based on the current knowledge and experience of FloorBridge® International GmbH about the products, and apply if properly stored, handled and under normal conditions in accordance with FloorBridge® International GmbH recommendations. In practice, the differences in materials, substrates and deviating working conditions are so substantial, that FloorBridge® International GmbH shall neither accept any warranty nor liability for a particular merchantability or suitability for a particular purpose, neither derived from this information nor from a written recommendation or any other advice offered. The user of the product must verify the product's suitability for the intended purpose of use.

FloorBridge® International GmbH reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to final confirmation and subject to our current terms and conditions regarding sales and deliveries.

Users must always refer to the most recent issue of the local product data sheet for the product concerned copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of FloorBridge® International GmbH.