

FloorBridge® WGX 20/50

eccentric

Heavy-duty prefabricated polymer floor joint profile in carbon fiber composite construction

Product characteristics:

- metal-free
- watertight system design possible (with FB sealing membrane)
- can be grinded several times
- suitable for heaviest loads
- backrest-friendly for forklift drivers
- reduced stacking costs (wheel bearings, tires, ...)
- tight coating connection possible
- low installation height
- individual colour design (coatable)
- can be driven on after a few hours

Technical specification:

Width of joint profile:	approx. 255 mm
Length of joint profile:	approx. 1.200 mm installed (1.195 mm net)
Thickness of joint profile:	approx. 20 mm
Joint width in substrate:	max. 50 mm
Contamination seal:	approx. 15 mm (depending on the version)
Total horizontal joint movement:	30 mm (-10/+20 mm)
Operating temperature range:	-25°C to a maximum of +40°C (if lower or higher temperatures consult the material manufacturer)
Grindable:	max. 2 mm
Compressive strength:	80 N/mm ² (ONR 23303)
Load:	corresponds to forklift class FL6 - axle load 170 kN (DIN EN 1991-1-1)
Fire classification:	Bfl-s1 (hardly inflammable)
Colour:	grey
Packaging (euro-pallet):	84 pcs. à 1,20 m, total: 100,8 m

Fields of application:


- Warehouses and high-bay warehouses
- Industrial buildings
- Car manufacturers and supplier companies
- Production plants
- Shopping centres & supermarkets
- Hospitals and laboratories
- Pharmaceutical industry (production and distribution)
- Food industry (production and distribution)

Explanation:

The joint movements of the components must be calculated by a specialist (structural engineer / planner) and made available to all parties involved. The load specifications do not apply to the floating installation variant.

Installation Instruction:

This eccentric joint profile must be installed 90 mm offset (eccentric) from the edge of the existing joint (see drawing below).

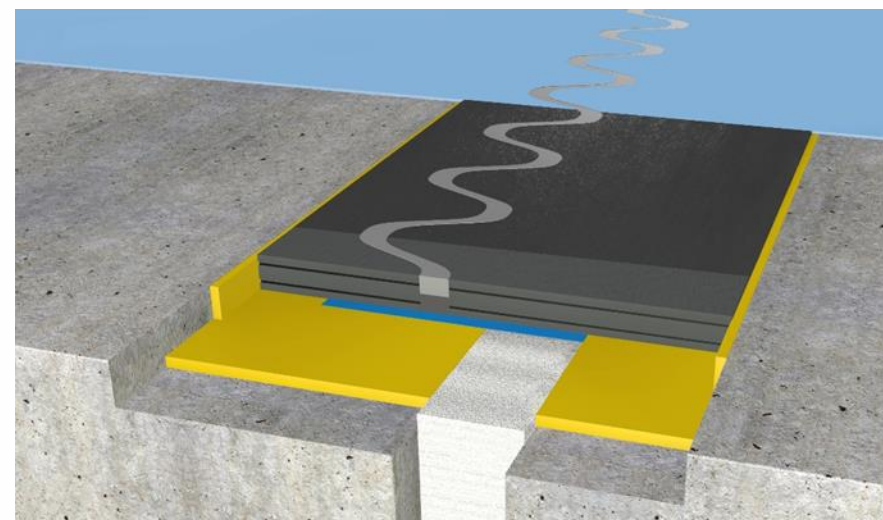

The installation must be carried out by trained specialists!

Substrate quality, preparation and processing:

Refer to the FloorBridge® Installation Manual.

Application instructions:

Please refer to the product data sheet of the composite adhesive FloorBridge® series used in the installation and/or the FloorBridge® Installation Manual.

Cleaning of tools:

Please refer to the product data sheet of the composite adhesive used in the installation.

Notes on application / limitations:

No vertical movements may occur in the concrete slabs at the joint area. If there is a vertical movement of the concrete slabs in the joint area, this must be repaired before the joint repair by suitable measures such as anchoring, pinning, etc. or ground solidification (cement paste injections or the like); this is absolutely necessary for the stability of the concrete slab!

Settlement of the ground or adhesive in the joint area can cause cracks in the FloorBridge® joint profile. These cracks do not constitute a defect, since they do not affect the viability and usability.

The prefabricated joint profile can be delivered without or with different dirt brakes depending on requirements. (Compriband or grout) Depending on the joint movement, the dirt brake can swell out, sink or split.

However, this has no effect on the technical usability of the FloorBridge® joint profile since the dirt brake is intended to reduce the contamination.

Joint sealants in parking garages or industrial floor areas are subject to increased wear and therefore are considered as "maintenance joints". This maintenance joint serves for better cleanability of the joint profile and is not permanently impermeable. The dirt brake should be periodically checked, cleaned and, if necessary, renewed.

The dirt brake itself must not be sealed/coated. If waterproofing is required, a sealing tape from the FloorBridge® series must be installed under the FloorBridge® joint profile.

As the FloorBridge® joint profile changes colour when exposed to UV-radiation, it must be sealed with a suitable protective coating, if colour stability is required. In the event of very high temperature changes, cracking in the butt joint (adhesive) may occur in the abutting area of the individual profiles. This does not affect the trafficability and tightness of the system and therefore does not affect the usability. FloorBridge® joint profiles may be crossed at a maximum speed of <30 km / h.

If the joint profile has been ground too deep, FloorBridge® International GmbH will not be held liable. No liability is assumed for the case of non-intended use or installation.

Storage conditions:

The FloorBridge® joint profile must be stored horizontally and fully horizontal indoors at temperatures between +5°C and +35°C.

Value Base:

All technical data stated in this product data sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

Ecology, health and safety information (reach):

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 REACH). It does not contain substances that are released from the product during normal use. A safety data sheet following article 31 of the same regulation is not needed to bring the product onto the market, to transport or use it. For safe use follow the instructions given in this product data sheet.

Based on our current knowledge, this product does not contain any SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency ECHA in concentrations above 0.1% (w/w).

Legal notes:

The information, and, in particular, the recommendations relating to the application and end-use of FloorBridge® products, are given in good faith based on the current knowledge and experience of FloorBridge® International GmbH about the products, and apply if properly stored, handled and under normal conditions in accordance with FloorBridge® International GmbH recommendations.

In practice, the differences in materials, substrates and deviating working conditions are so substantial, that FloorBridge® International GmbH shall neither accept any warranty nor liability for a particular merchantability or suitability for a particular purpose, neither derived from this information nor from a written recommendation or any other advice offered. The user of the product must verify the product's suitability for the intended purpose of use.

FloorBridge® International GmbH reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to final confirmation and subject to our current terms and conditions regarding sales and deliveries.

Users must always refer to the most recent issue of the local product data sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of FloorBridge® International GmbH.