

## FloorBridge® CPS 20/80 TD

Carbon Composite floor joint profile with replaceable expansion insert | for top parking deck



### Product characteristics

- tested tight coating connection
- replaceable expansion insert (without damaging the OS-systems)
- metal-free
- easy installation
- tested watertight system design
- overcoatable and free in design
- Complies with serviceability class R4 according to EN 1504-3 (repair principles 3.1, 3.2, 7.1, 7.2)

### Technical specification

Width of joint profile	approx. 325 mm
Length of joint profile	approx. 1.200 mm installed (1.195 mm net)
Thickness of joint profile	approx. 18 mm
Joint width in substrate	max. 80 mm
Expansion insert	approx. 130 mm
	Expansion insert 5 mm higher than profile leg
Total horizontal joint movement	80 mm (-30/+50 mm)
Total vertical joint movement	50 mm (-25/+25 mm)
Load (Truck)	600 kN
Colour joint profile	grey
Colour expansion insert	black
Packaging (euro-pallet)	84 sets. à 1,20 m (100,8 m)


### Fields of application

Top, freely weathered level in the parking deck  
Crack-bridging coating system according to the material manufacturer (dynamic crack bridging: minimum class B 3.2 in accordance with EN 1062-7)

**The installation must be carried out by trained specialists!**

### Explanation

The joint movements of the components must be calculated by a specialist (structural engineer / planner) and made available to all parties involved. The load specifications do not apply to the floating installation variant.

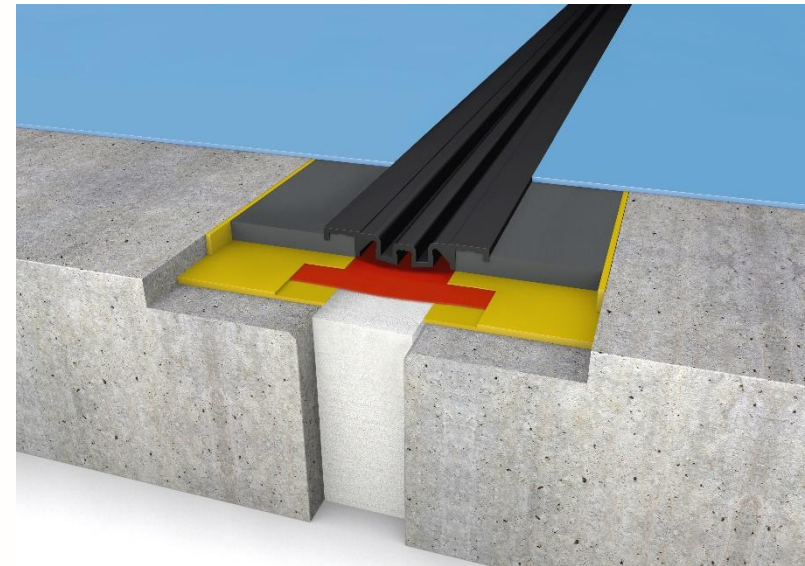

### **Substrate quality, preparation and processing**

Please refer to the product data sheet of the composite adhesive FloorBridge® Connect series used in the installation and/or the FloorBridge® Installation tutorial.

### **Notes on application / limitations**

If waterproofing is required, a sealing tape from the FloorBridge® series must be installed under the FloorBridge® joint profile.

As the FloorBridge® joint profile changes colour when exposed to UV-radiation, it must be sealed with a suitable protective coating, if colour stability is required. The substrate must be prepared according to the sealing data sheet. In the event of very high temperature changes, cracking in the butt joint (adhesive) may occur in the abutting area of the individual profiles. This does not affect the trafficability and tightness of the system and therefore does not affect the usability. FloorBridge® joint profiles may be crossed at a maximum speed of <30 km / h. No liability is assumed for the case of non-intended use or installation.

### **Attention!**

Passive transponders are processed in this product for product tracing. These can cause malfunctions in driverless transport systems (self-propelled forklifts). If necessary, consult the manufacturer - depending on the application/requirement, the profiles can also be obtained without transponders.

### **Storage conditions**

The FloorBridge® joint profile must be stored horizontally and fully supported indoors at temperatures between +5°C and +35°C.

### **Value Base**

All technical data stated in this product data sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

### **Ecology, health and safety information (reach)**

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 REACH). It does not contain substances that are released from the product during normal use. A safety data sheet following article 31 of the same regulation is not needed to bring the product onto the market, to transport or use it. For safe use follow the instructions given in this product data sheet.

Based on our current knowledge, this product does not contain any SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency ECHA in concentrations above 0.1% (w/w).

### **Legal notes**

The information, and, in particular, the recommendations relating to the application and end-use of FloorBridge® products, are given in good faith based on the current knowledge and experience of FloorBridge® International GmbH about the products, and apply if properly stored, handled and under normal conditions in accordance with FloorBridge® International GmbH recommendations.

In practice, the differences in materials, substrates and deviating working conditions are so substantial, that FloorBridge® International GmbH shall neither accept any warranty nor liability for a particular merchantability or suitability for a particular purpose, neither derived from this information nor from a written recommendation or any other advice offered. The user of the product must verify the product's suitability for the intended purpose of use.

FloorBridge® International GmbH reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to final confirmation and subject to our current terms and conditions regarding sales and deliveries.

Users must always refer to the most recent issue of the local product data sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of FloorBridge® International GmbH.